

ATTENTION: THIS UNIT WAS TESTED BEFORE IT WAS SHIPPED. YOU WILL NEED TO REPROGRAM THE UNIT FOLLOWING THE INSTRUCTIONS BELOW. CONNECT THE POWER AND GROUND TO THE UNIT AND THEN YOU CAN BEGIN PROGRAMMING THE TRANSMITTER TO THE BASE UNIT.

FOR STEP BY STEP INSTRUCTIONS VIA VIDEO, VISIT WWW.CONTROLALLWIRELESS.COM

Programming Transmitter to Receiver:

The following are the step by step procedures for setting the unique address between the transmitter and receiver or adding extra transmitters to the receiver (up to 40 transmitters).

Note you need to be next to the receiver and the receiver needs to have 12 volt power and ground connected and the cover off of it.

On the backside of the standard Transmitter, use a paperclip and **GENTLY** insert it in the hole next to the clear blue window. Once the programming button is depressed, a blue LED will begin to blink for 15 seconds. Flip the Transmitter over and firmly depress all 8 buttons starting with the ON button within 15 seconds. Now the Transmitter has acquired a 1 in 16 million address.



MAKE SURE THE BLUE LIGHT GOES OUT BEFORE PROCEEDING.

Next step is to remove the receiver box cover noting the drain hole positions in the cover. With the receiver connected to a 12VDC power source look inside the box next to the red LED depress the black programming button. The red LED will begin to flash for 15 seconds. Take the Transmitter while the red LED is flashing and depress all buttons one at a time on the transmitter. When you are finished press the black button on the receiver again and the red light will stop blinking and you are now programmed. To test this press a button on your transmitter and the red light on the receiver will come on. Re-install the cover noting drain hole position, depress the "OFF" button on the transmitter to make sure the unit is off. The 600DC1 is now ready to operate the DC motor.

Add button

Blue light



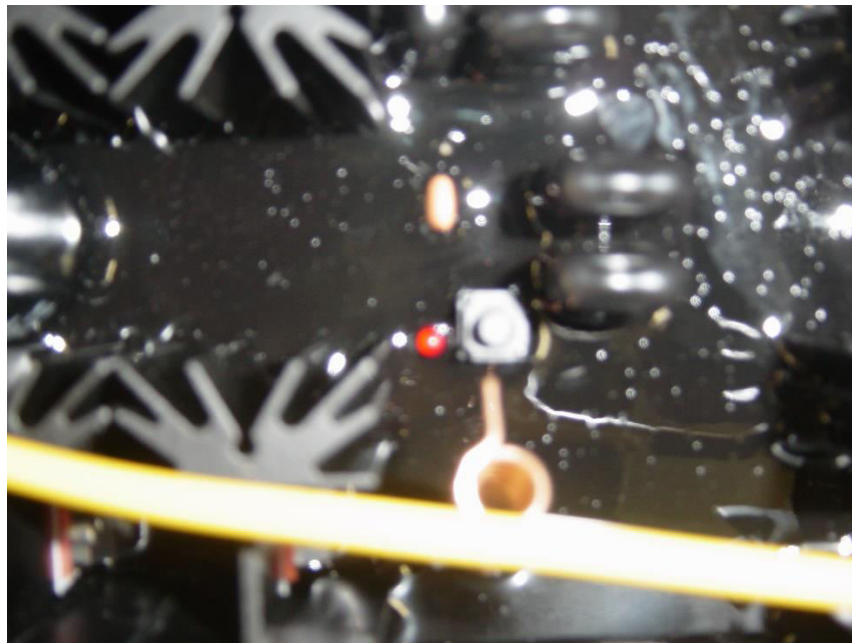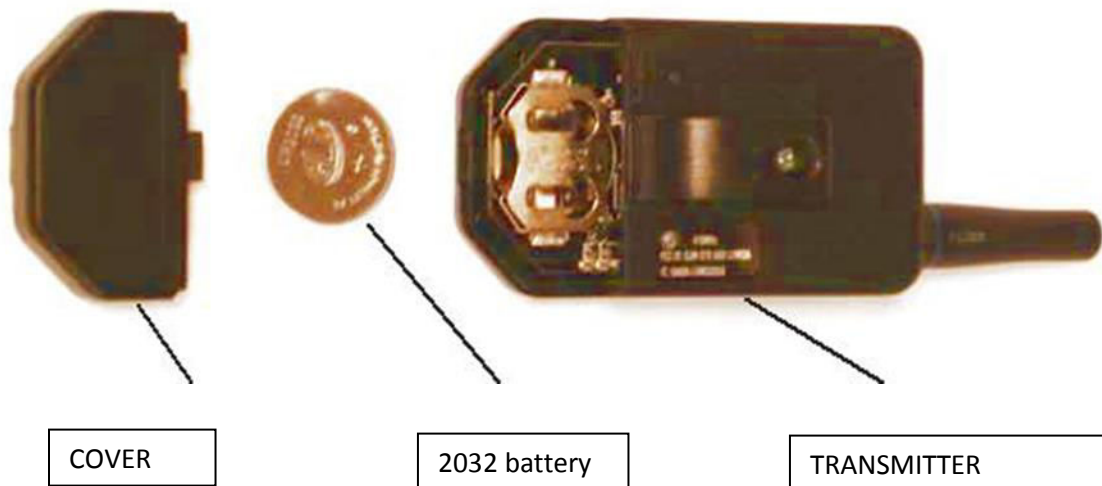

Picture of receiver button with red LED Light

More info: see www.controlallwireless.com or email sales@controlallwireless.com